

OMP RACE SEATS - SIZE GUIDE



The following measurements are given as a guide. Actual measurements may vary to accomodate production. Seat fitting type: according to FIA regulations the seat must be fixed to the brackets by means of at least four bolts M8 class 8.8. The diagram shows the distances between the fixing points in mm.


* the weight refers to the complete seat (tolerance of 10%).

** referring to bottom fixing points of the sliding guide.


TYPE W: inner side int. 289 mm

TYPE Y: bottom 345x270 mm

All measurements in millimetres

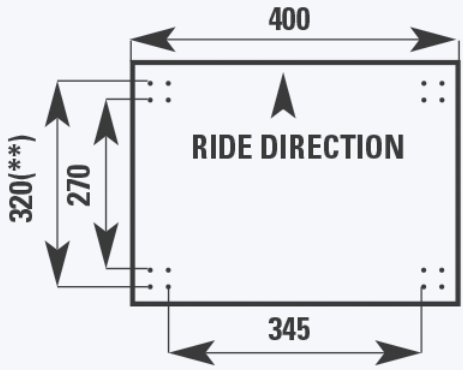

- Key**
- A = external max width at shoulders
 - B = seat bottom to mid shoulders
 - C = seat bottom max external width
 - D = total height of seat back
 - E = external max width at seat fixing inserts
 - F = seat inner width (belt holes area)
 - G = bottom length
 - H = internal width between side head protections
 - I = external width between side head protections
 - J = height from the bottom to the harness slot

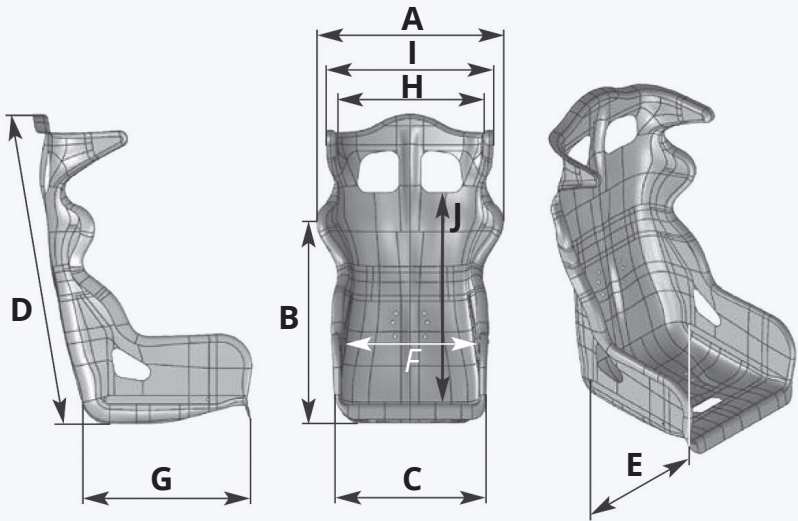

Seat	Homolog.	Shell	Airnet Material	Cushions Split Leg	A	B	C	D	E	F	G	H	I	J	Harness Slots	Weight* (kg)	Fixing
HTE ONE HA/761W	FIA 8862/2009	Carbon		✓	625	620	490	890	380	365	480	365	500	655	5	9.2	W
HTE ONE XL HA/798	FIA 8862/2009	Carbon		✓	680	580	490	970	400	390	515	370	520	700	5	9.9	W
HRC-ONE HA/789	FIA 8862/2000	Carbon	✓	✓	615	635	455	900	405	365	470	345	460	630	5	9.2	W
HRC-R CARBON AIR HA/786	FIA 8855/1999	Carbon	✓	✓	615	635	460	890	395	365	470	345	490	620	5	6.2	W
HRC-R FIBERGLASS AIR HA/793	FIA 8855/1999	Fiberglass	✓	✓	620	635	470	900	390	365	470	370	530	620	5	9.5	W
HRC-R FIBERGLASS AIR XL HA/794	FIA 8855/1999	Fiberglass	✓	✓	610	680	490	980	425	400	480	360	520	675	5	10.3	W
HRC-R CARBON HA/788	FIA 8855/1999	Carbon	✓	✓	615	635	460	890	395	365	470	345	490	620	5	5.8	W
PROTOTIPO HA/745	FIA 8855/1999	Carbon	✓	✓	530	520	440	790	385	380	480	360	450	570	5	6.1	W
HTE-R HA/772E	FIA 8855/1999	Fiberglass	✓	✓	560	570	515	880	420	390	490	315	480	665	5	9.4	W
HTE-R 400 HA/780E	FIA 8855/1999	Fiberglass	✓	✓	560	570	515	880	420	390	490	310	420	665	5	10.2	W
HTE-R XL HA/771E	FIA 8855/1999	Fiberglass	✓	✓	580	610	530	920	440	415	550	305	485	705	5	10.5	W
HTE-R CARBON HA/768E	FIA 8855/1999	Carbon	✓	✓	545	560	465	880	390	370	470	330	490	665	5	6.6	W
HTE-R CARBON XL HA/779E	FIA 8855/1999	Carbon	✓	✓	560	580	485	890	425	390	490	330	490	665	5	6.8	W
WRC-R HA/773E	FIA 8855/1999	Fiberglass	✓	✓	620	600	510	890	410	390	480	/	/	645	5	8.8	W
WRC-R CARBON HA/773E	FIA 8855/1999	Carbon	✓	✓	590	600	495	890	400	365	490	/	/	645	5	5.6	W
WRC-R XL HA/778E	FIA 8855/1999	Fiberglass	✓	✓	665	600	520	920	430	415	480	/	/	700	5	10.7	W
ARS-R HA/774E	FIA 8855/1999	Fiberglass	✓		590	600	500	910	395	370	490	/	/	615	5	8.9	W
ARS-R CARBON HA/770E	FIA 8855/1999	Carbon	✓		585	600	480	890	380	360	490	/	/	635	5	5.8	W
RS-P.T. 2 HA/762E	FIA 8855/1999	Fiberglass			565	560	510	880	420	395	480	340	510	675	5	10.4	W
CHAMP R HA/766E	FIA 8855/1999	Fiberglass			590	575	520	890	400	360	480	/	/	615	5	8.8	W
TRS-E PLUS HA/744E	FIA 8855/1999	Tubular Steel			585	640	510	890	410	390	470	/	/	600	5	10.3	W Y
TRS-E SKY HA/760E	FIA 8855/1999	Tubular Steel			585	640	510	890	410	390	470	/	/	600	5	10.8	W Y
TRS-E HA/741E	FIA 8855/1999	Tubular Steel			585	640	510	890	410	390	470	/	/	600	5	10.3	W Y
TRS-E XS HA/783E	FIA 8855/1999	Tubular Steel			520	600	420	870	395	330	470	/	/	575	5	10.2	W Y
TRS-E XL HA/781E	FIA 8855/1999	Tubular Steel			625	680	540	950	450	415	520	/	/	665	5	12.3	W
FIRST-R HA/790	FIA 8855/1999	Fiberglass			620	600	510	890	410	390	480	/	/	630	5	8.9	W
TRS LEGEND HA/7775	FIA 8855/1999	Tubular Steel			585	640	510	890	410	390	470	/	/	600	5	10.8	W Y
Seat	Homolog.	Shell	Airnet Material	Cushions Split Leg	A	B	C	D	E	F	G	H	I	J	Harness Slots	Weight* (kg)	Fixing